

DEFLECTION of FRAMES

HST7



Year 3
study

Features

- High quality, robust and durable components.
- Realistic steel welded portals.
- 5 x optional portals available.
- Numerous loading and dial gauge positions around each portal.
- Potential for customer designed portals to be used.
- Dedicated e-book supplied

Description

A 'rectangular' Portal frame and an 'S' frame made from rectangular solid steel section are provided with either pinned ends or simple supports to enable each frame to be set up in the HST1 Universal Frame and Stand (sold separately) and loaded horizontally and vertically. One end of the portal frame pivots on a knife edge, while the other end is free to move horizontally on a track plate against a load cell. Horizontal reactions are monitored using the integral load cell within the track plate and its output fed into the HDA200 Interface (sold separately). Frame deflection and sway is measured using the dial gauges supplied. Load hangers, calibrated weights, cords and pulleys are provided to apply vertical and/or horizontal loading to the frames.

Related Laws/Applications

- Castiglianos' Theorem.
- Clerk Maxwell's Theorem.
- Simpsons Rule.
- Horizontal Thrust
- Side Sway.
- Unit Load Method.
- Bending Moment Diagrams (BMD).

Learning capabilities

- Comparison of experimental results with theoretical values derived using Castigliano's theorem and numerical analysis by Simpson's rule.
- Study the load, horizontal thrust, deflections, sway in portal frames.

Technical Specification

- Rectangular Portal: 600mm (W) x 450mm (H)
- "S" Frame with roller: 600mm (W) x 600mm (H)
- Steel Portal Frame material: 25mm (W) x 8mm (t)
- Weights Set: 2 x 0.1N, 4 x 0.2N, 1 x 1N, 2 x 2N, 6 x 5N, 2 x 20N, 1 x 50N.
- Load Cell: 0...500N
- Digital Dial Gauge: 12.7mm travel; 0.01mm resolution

Essential Ancillaries

- HST1 (or HST100)
- HDA200

Recommended Ancillaries

- HST7a
- HST7c
- HST7d
- HST7e
- HST7g


What's in the Box?

- 1 x Rectangular Portal
- 1 x 'S' Frame Portal
- 1 x Load Cell Track plate
- 2 x Digital Dial gauge and cable
- 2 x 0.1N, 4 x 0.2N, 1 x 1N, 2 x 2N weights
- 6 x 5N, 2 x 20N, 1 x 50N weights
- 2 x Load hanger
- 2 x Hanger Clamp
- 2 x Pulley
- 1 x Tape measure
- Accessories container
- 3 x Hex wrench
- Instruction manual
- Software
- E-book
- Packing list
- Test sheet

You might also like

- HST8
- HST12

Supporting Software

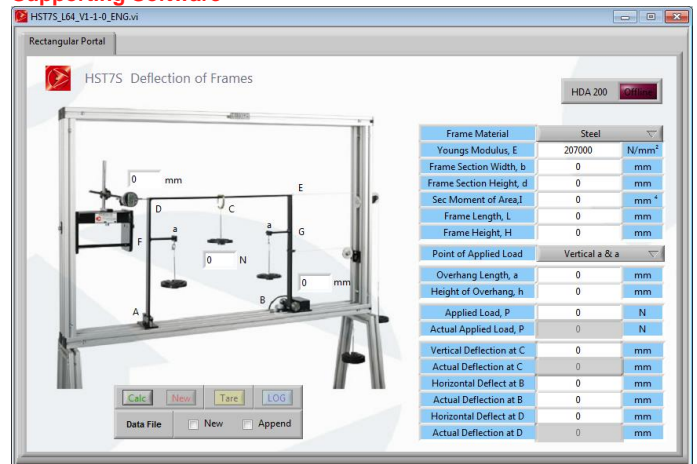

- HST7S

Minimum System Requirements

- Computer or Laptop running WIN7 or above

Weights & Dimensions

- Weight: 30 kg
- Length: 1350mm
- Width: 730mm
- Height: 580mm

Essential Services

- 110/120V, 60Hz or 220/240V, 50Hz, single phase, live neutral and earth for HDA200

Operational Conditions

- Storage temperature: -10°C to +70°C
- Operating temperature range: +10°C to +50°C
- Operating relative humidity range: 0 to 95%, non condensing

Ordering information

To order this product, please call PA Hilton quoting the following code: HST7

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure.

Copyright © 2018 P.A. Hilton Limited. All rights reserved. This technical leaflet, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of P. A. Hilton Limited. Hi-Tech Education is a registered trade mark of P. A. Hilton Limited.

COUNTRY OF ORIGIN - UK WARRANTY PERIOD - 5 YEARS